

DESCRIPTION

Completely-in-the-canal hearing aid (CIC), with 16 channels WDRC, Battery 10, programmable through fitting software, Push button for program change.

INTENDED USE

The MICROSON m6 CIC P hearing instrument is indicated to compensate from moderate to severe hearing loss (mixed or sensorineural). It is not suitable for children.

See Fitting Range⁽¹⁾

Features

- ✓ Matrix 121/51 @ 2cc
- ✓ 100% Digital Technology
- ✓ Digitally Programmable
- ✓ Real Time Analysis
- ✓ 16 Independents Channels WDRC
- ✓ 4 Memories
- ✓ 128 Frequency Bands Analysis
- ✓ 32 Bands equalizer
- ✓ Data Logging
- ✓ Automatic Feedback Canceller
- ✓ Audio in-situ
- ✓ Automatic Noise Reduction
- ✓ Alerts configurator (audio, beeps)
- ✓ Small Size
- ✓ Suitable for mobile phones*
- ✓ Battery 10 Type - PR70 (IEC 60086)


Requirements

- 89600, Fitting Software Microson CODA e-STUDIO 6 (6.1.4 or higher)
- 53781, 4 Pin Hi-Pro Cable Right
- 53832, 4 Pin Hi-Pro Cable Left
- 83968, 3 Pin Flex Cable
- 66183, NOAHLINK^A Programming Interface (Kernel v. 1.55.03)
- 73194, HI-PRO^B USB Hearing Instrument Programmer (Firmware 3.00 or higher)
- 88616, HI-PRO^{B2} Hearing Instrument Programmer (Firmware 4.00 or higher)

⚠ ATTENTION:

- Requires Fitting Software Microson CODA e-STUDIO 6 (6.1.4 or higher)
- Requires Battery 10 for programming

⁽¹⁾ Fitting Range

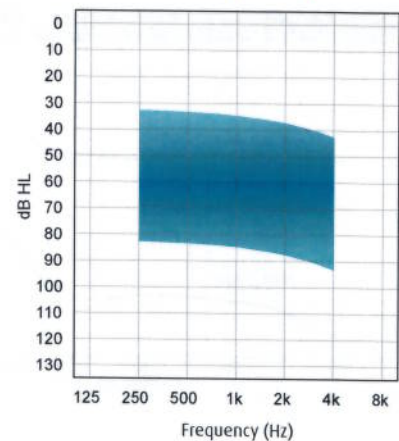

Product Data



* In compliance with IEC 60118-13:2011

^(A)NOAH & NOAHLINK are licensed products and registered trademarks of HIMSA A/S in Denmark.

^(B)HI-PRO is a registered trademark of GN Otometrics A/S in Denmark..